

## DS-KV6133-WME1/Flush IP Villa Door Station



- 2 MP camera with IR supplement
- One button calling design for easier calls
- Built-in card reader module
- Standard PoE power supply
- IP65 protection level with aluminum alloy casing
- Call directly to Hik-Connect APP without indoor station

## ▪ Specification


System parameters	
Operation system	Linux
ROM	32 MB
RAM	256 MB
Processor	Embedded high performance processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	1
Resolution	Main stream: 1920 × 1080p, 1280 × 720p Sub stream: 1280 × 720p, 640 × 480p
FOV	Horizontal:129°,Vertical: 75°
Wide dynamic range (WDR)	Support 120 dB
Supplement light	IR light, up to 2.5 m
Video compression standard	H.264
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711 U、 G.711 A、 Opus、 AAC-LD、 AAC-LC、 G.726、 G.722.1
Audio output	1 built-in loudspeaker
Audio compression bitrate	16/32/64 Kps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
User capacity	2000
Face capacity	/
Card capacity	10000
Network parameters	
Network protocol	TCP/IP, RSTP
Wi-Fi	2.4GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	4
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
TAMPER	1
Exit button	1
RS-485	1
USB	/
Wiegand	/
TF card	1(Reserved)

Alarm output	/
Lock control	1 relay, Max. 30 VDC 2 A
Door contact input	1
Audio output	1 external loudspeaker(Reversed)
<b>General</b>	
Button	1 physical button
Installation	Surface mounting, Flush mounting
Indicator	2
Weight	Net weight: 0.190 kg Gross weight: 0.414 kg
Protective level	IP65
Working temperature	-40 °C to 53 °C (-40 °F to 127.4 °F)
Working humidity	10% to 95% (no-condensing)
Dimension (W × H × D)	181.6 mm × 103.6 mm × 29.5 mm (7.1" × 4.0" × 1.1")
Battery	/
Application environment	Outdoor
Power consumption	< 10 W
Power supply	12 VDC, 1.5 A,IEEE802.3af, Standard PoE
Language	English, Arabic, French (Europe), Russian, Spanish (Europe), Italian, German, Polish, Turkish, Portuguese, Portuguese (Brazil), Uzbek, Kazakh, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovenian, Slovak, Hebrew, Swedish, Finnish, Mongolian, Vietnamese, Traditional Chinese

### ▪ Available Model

DS-KV6133-WME1/Flush

### ▪ Dimension

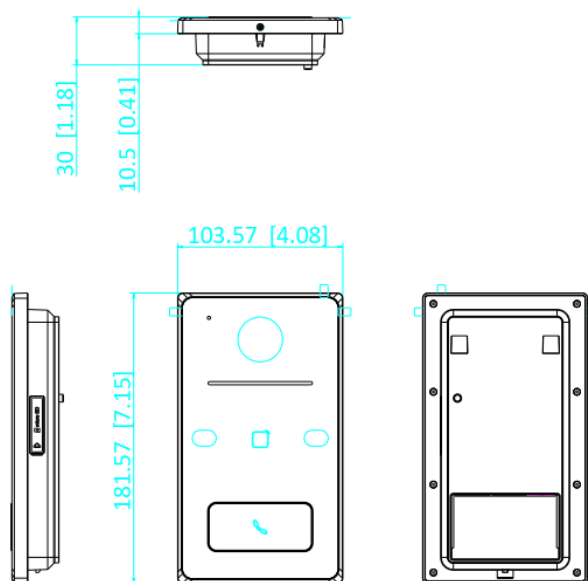

Unit:mm [inch]

SCALE 1:1

▪ **Accessory**

▪ **Included**

**DS-KABV6133-G/**

**Surface**

**Gang box**



▪ **Optional**

**DS-KABV6133-RS**

**Rain shield**



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

